




THIN SHEET NUT-INSERT

SPECIFICATIONS


MATERIAL : LOW CARBON STEEL
FINISH : ZINC CLEAR CR III

Full Hex Flat Head Type :

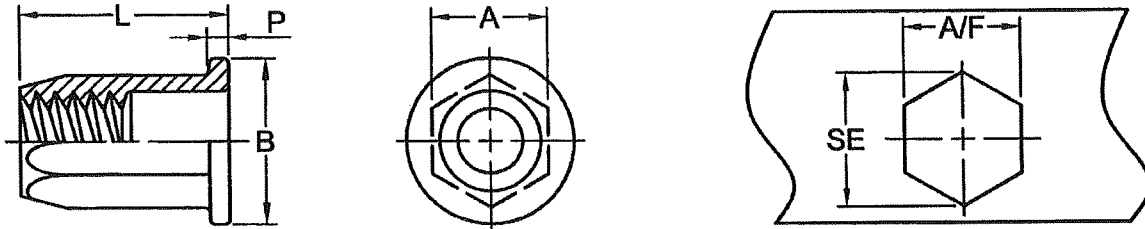

Thread size	Item No.	A -0.2	B ± 0.35	Grip Range	L ± 0.35	P ± 0.2	SE Min	Hex Hole A/F(+0.1)
M4 x 0.7	HH LM4	6.00	9.00	0.5 ~ 2.5	11.20	0.80	6.80	6.10
M4 x 0.7	HH LM4-L	6.00	9.00	2.5 ~ 4.0	12.70	0.80	6.80	6.10
M5 x 0.8	HH LM5	7.00	10.00	0.5 ~ 3.0	13.00	1.00	8.00	7.10
M5 x 0.8	HH LM5-L	7.00	10.00	3.0 ~ 4.5	14.50	1.00	8.00	7.10
M6 x 1.0	HH LM6	9.00	13.00	0.5 ~ 3.0	16.00	1.50	10.30	9.10
M6 x 1.0	HH LM6-L	9.00	13.00	3.0 ~ 5.0	18.00	1.50	10.35	9.10
M8 x 1.25	HH LM8	11.00	16.00	0.5 ~ 3.0	18.00	1.50	12.60	11.10
M8 x 1.25	HH LM8-L	11.00	16.00	3.0 ~ 5.5	20.50	1.50	12.65	11.10
M10 x 1.5	HH LM10	13.00	19.00	1.0 ~ 4.5	24.00	2.00	14.90	13.10
M10 x 1.5	HH LM10-L	13.00	19.00	4.0 ~ 6.0	25.50	2.00	14.95	13.10
M12 x 1.75	HH LM12	16.00	23.00	1.5 ~ 5.0	27.00	2.00	18.30	16.10

Full Hex Flush Head Type :

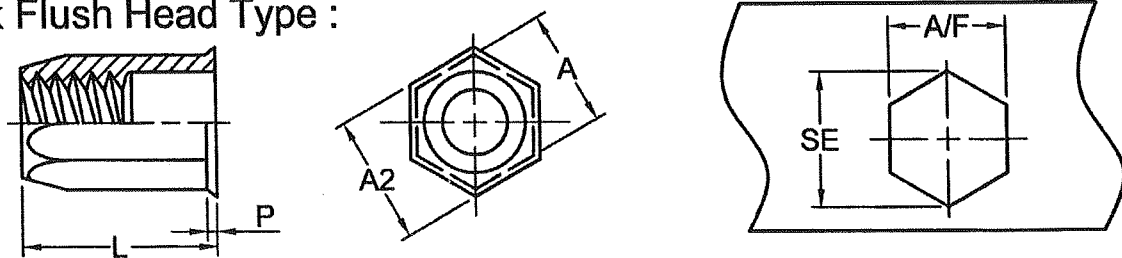

Thread size	Item No.	A -0.2	A2 ± 0.35 *+ 0.55/-0.1	Grip Range	L +0.5/-0.3 *±0.5	P ± 0.3	SE Min	Hex Hole A/F(+0.1)
M4 x 0.7	HH SM4	6.00	7.00	0.5 ~ 2.5	10.00	0.50	6.80	6.10
M4 x 0.7	HH SM4-L	6.00	7.00	2.0 ~ 4.0	12.20	0.50	6.85	6.10
M5 x 0.8	HH SM5	7.00	8.00	0.5 ~ 3.0	12.00	0.60	8.00	7.10
M5 x 0.8	HH SM5-L	7.00	8.00	2.0 ~ 4.5	14.75	0.60	8.05	7.10
M6 x 1.0	HH SM6	9.00	10.00	0.6 ~ 3.0	15.00	0.60	10.30	9.10
M6 x 1.0	HH SM6-L	9.00	10.00	3.0 ~ 5.5	*18.00	0.60	10.35	9.10
M8 x 1.25	HH SM8	11.00	12.00	0.7 ~ 3.5	17.50	0.50	12.60	11.10
M8 x 1.25	HH SM8-L	11.00	12.00	3.0 ~ 5.5	19.00	0.50	12.65	11.10
M10 x 1.50	HH SM10	13.00	14.50	1.0 ~ 4.5	23.00	1.00	14.90	13.10
M10 x 1.50	HH SM10-L	13.00	14.50	3.0 ~ 6.0	25.00	1.00	14.95	13.10
M12 x 1.75	HH SM12	16.00	*18.00	1.0 ~ 4.0	*25.00	1.00	18.30	16.10
M12 x 1.75	HH SM12-L	16.00	*18.00	3.5 ~ 6.5	28.00	1.00	18.30	16.10