



ASF

铝/铁封闭型抽芯铆钉 Aluminium/Steel Sealed Type

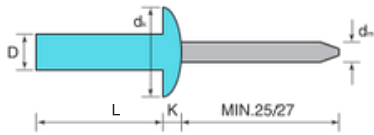

MATERIAL/材质:

Body:5056 Alu.Alloy 铆体:铝
Mandrel:Steel 钉芯:铁

FINISH/表面颜色:

Body:Polished 铆体:抛光
Mandrel:Zinc Plated 钉芯:镀锌



D	L	dk	k	dm	HOLE SIZE (DRILL)	Shear (N)	Tensile (N)		
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE (DRILL)	MIN.	MIN.
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ		
3.2 +0.08 -0.15	ASF 320065	6.5	0.5-2.0	5.8-6.7	1.3	2.00	3.3-3.4	1070	1248
	ASF 320080	8.0	2.0-3.5						
	ASF 320095	9.5	3.5-5.0						
	ASF 320110	11.0	5.0-6.5						
	ASF 320125	12.5	6.5-8.0						
4.0 +0.08 -0.15	ASF 400080	8.0	0.5-3.5	6.9-8.4	1.7	2.45	4.1-4.2	1560	2140
	ASF 400095	9.5	3.5-5.0						
	ASF 400110	11.0	5.0-6.5						
	ASF 400125	12.5	6.5-8.0						
	ASF 400150	15.0	8.0-10.5						
4.8 +0.08 -0.15	ASF 480080	8.0	1.0-3.0	8.3-10.1	2.0	2.95	4.9-5.0	2228	3075
	ASF 480095	9.5	3.0-5.0						
	ASF 480110	11.0	5.0-6.5						
	ASF 480130	13.0	6.5-8.0						
	ASF 480145	14.5	8.0-9.5						
	ASF 480160	16.0	9.5-11.0						
	ASF 480180	18.0	11.0-13.0						
	ASF 480210	21.0	13.0-16.0						
ASF 480250	25.0	16.0-20.0							
6.4 +0.08 -0.15	ASF 640125	12.5	1.5-6.0	11.6-13.4	2.7	3.9	6.5-6.6	4000	4900
	ASF 640160	16.0	6.0-8.5						
	ASF 640180	18.0	8.5-10.5						
	ASF 640200	20.0	10.5-12.5						
	ASF 640250	25.0	12.5-17.5						