



S / CLS

压铆螺母 SELF-CLINCHING NUTS

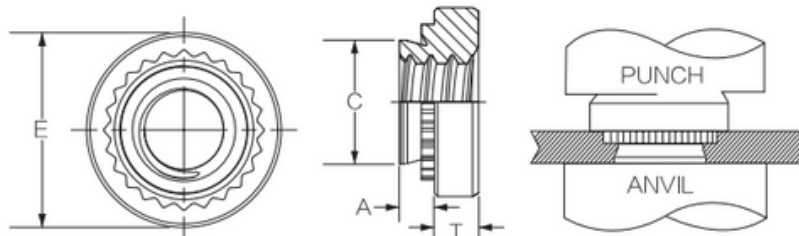

Part Number Designation

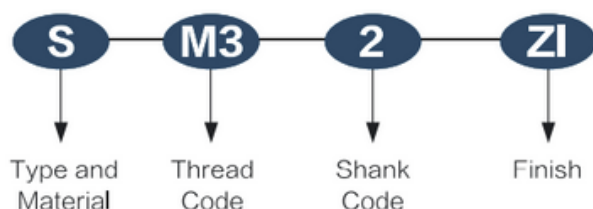

S: Carbon Steel
 CLS: 303 Stainless Steel
 SP: 416 Series Stainless Steel
 CLA: Aluminum



All dimensions are in millimeters (Size Unit: mm)

	Thread Size X Pitch	Type		Thread Code	Shank Code	A (Shank) MAX.	Rec Min.sheet Thickness	Hole size In Sheet +0.08	C MAX.	E ± 0.25	T ± 0.25	Min.Dist Hole C/L To Edge
		Fastener Material										
		Carbon Steel	Stainless Steel									
METRIC	M2X0.4	S	CLS	M2	0	0.77	0.8-1	4.25	4.22	6.3	1.5	4.8
					1	0.97	1					
					2	1.38	1.4					
	M2.5X0.45	S	CLS	M2.5	0	0.77	0.8-1	4.25	4.22	6.3	1.5	4.8
					1	0.97	1					
					2	1.38	1.4					
	M3X0.5	S	CLS	M3	0	0.77	0.8-1	4.25	4.22	6.3	1.5	4.8
					1	0.97	1					
					2	1.38	1.4					
	M3.5X0.6	S	CLS	M3.5	0	0.77	0.8-1	4.75	4.73	7.1	1.5	5.6
					1	0.97	1					
					2	1.38	1.4					
	M4X0.7	S	CLS	M4	0	0.77	0.8-1	5.4	5.38	7.9	2	6.9
					1	0.97	1					
					2	1.38	1.4					
	M5X0.8	S	CLS	M5	0	0.77	0.8-1	6.4	6.38	8.7	2	7.1
					1	0.97	1					
					2	1.38	1.4					
	M6X1	S	CLS	M6	0	1.15	1.2	8.75	8.72	11.05	4.08	8.6
					1	1.38	1.4					
					2	2.21	2.3					
	M8X1.25	S	CLS	M8	1	1.38	1.4	10.5	10.47	12.65	5.47	9.7
					2	2.21	2.3					
	M10X1.5	S	CLS	M10	1	2.21	2.31	14	13.97	17.35	7.48	13.5
					2	3.05	3.18					

S / CLS

压铆螺母 SELF-CLINCHING NUTS

Part Number Designation

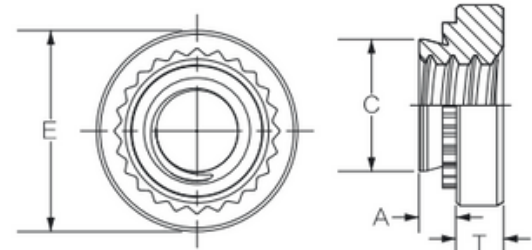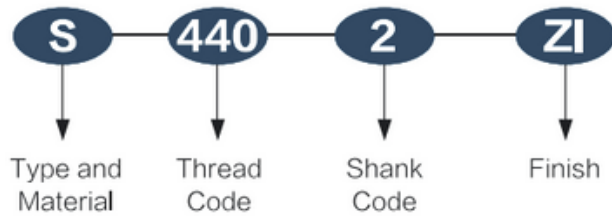

All dimensions are in millimeters (Size Unit:mm)

	Thread Size	Type		Thread Code	Shank Code	A (Shank) MAX.	Rec Min.sheet Thickness	Hole size In Sheet +0.03 -0.00	C MAX.	E ± 0.10	T ± 0.10	Min.,Dist Hole C/L To Edge
		Fastener Material										
		Carbon Steel	Stainless Steel									
UNIFIED	.086-56 (#2-56)	S	CLS	256	0 1 2	.030 .038 .054	.030 .040 .056	.166	.165	.25	.07	.19
	.099-48 (#3-48)	S	CLS	348	0 1 2	.030 .038 .054	.030 .040 .056	.166	.165	.25	.07	.19
	.112-40 (#4-40)	S	CLS	440	0 1 2 3	.030 .038 .054 .087	.030 .040 .056 .091	.166	.165	.25	.07	.19
	.138-32 (#6-32)	S	CLS	632	0 1 2 3	.030 .038 .054 .087	.030 .040 .056 .091	.1875	.187	.28	.07	.22
	.164-32 (#8-32)	S	CLS	832	0 1 2 3	.030 .038 .054 .087	.030 .040 .056 .091	.213	.212	.31	.09	.27
	.190-24 (#10-24)	S	CLS	024	0 1 2 3	.030 .038 .054 .087	.030 .040 .056 .091	.250	.249	.34	.09	.28
	.190-32 (#10-32)	S	CLS	032	0 1 2 3	.030 .038 .054 .087	.030 .040 .056 .091	.250	.249	.34	.09	.28
	.216-24 (#12-24)	S	CLS	1224	0 1 2 3	.030 .038 .054 .087	.030 .040 .056 .091	.277	.276	.38	.13	.31
	.250-20 (1/4-20)	S	CLS	0420	0 1 2 3	.045 .054 .087 .120	.047 .056 .091 .125	.344	.343	.44	.17	.34
	.250-28 (1/4-28)	S	CLS	0428	0 1 2 3	.054 .087 .120	.056 .091 .125	.344	.343	.44	.17	.34
	.313-18 (5/16-18)	S	CLS	0518	0 1 2 3	.054 .087 .120	.056 .091 .125	.413	.412	.50	.23	.38
	.313-24 (5/16-24)	S	CLS	0524	0 1 2 3	.054 .087 .120	.056 .091 .125	.413	.412	.50	.23	.38
	.375-16 (3/8-16)	S	CLS	0616	0 1 2 3	.087 .120 .235	.091 .125 .250	.500	.499	.56	.27	.44
	.375-24 (3/8-24)	S	CLS	0624	0 1 2 3	.087 .120 .235	.091 .125 .250	.500	.499	.56	.27	.44
	.500-13 (1/2-13)	S	CLS	0813	0 1 2	.120 .235	.125 .250	.656	.655	.81	.36	.63
	.500-20 (1/2-20)	S	CLS	0820	0 1 2	.120 .235	.125 .250	.656	.655	.81	.36	.63