


SS

全铁开口型抽芯铆钉 Steel/Steel Dome Head

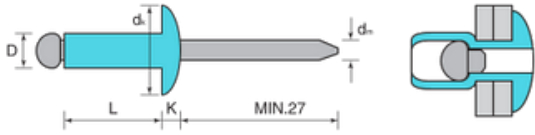

MATERIAL/材质:

Body:steel 铆体:铁
Mandrel:Steel 钉芯:铁

FINISH/表面颜色:

Body:Zinc Plated 铆体:镀锌
Mandrel:Zinc Plated 钉芯:镀锌



D RIVET SIZE	PART NUMBER	L RIVET LENGTH [+1/-0]	GRIP RANGE MIN-MIX	dk	k	dm	HOLE SIZE(DRILL) Φ	Shear (N) MIN.	Tensile (N) MIN.
				HEAD DIA	HEAD HEIGHT MAX.	MANDREL DIA MAX.			
2.4 +0.08 -0.15	SS2404	4.0	0.5-2.0	4.2-5.0	1.0	1.6	2.5-2.6	500	700
	SS2406	6.0	2.0-4.0						
	SS2408	8.0	4.0-6.0						
	SS2410	10.0	6.0-8.0						
	SS2412	12.0	7.0-9.5						
	SS2414	14.0	8.0-11.5						
3.0 +0.08 -0.15	SS2416	16.0	10.0-13.0	5.4-6.3	1.3	2.10	3.1-3.2	1000	1100
	SS3006	6.0	1.0-3.5						
	SS3008	8.0	3.5-5.0						
	SS3010	10.0	5.0-7.0						
	SS3012	12.0	7.0-9.0						
	SS3014	14.0	9.0-11.0						
3.2 +0.08 -0.15	SS3016	16.0	9.0-12.5	5.8-6.7	1.3	2.10	3.3-3.4	1100	1200
	SS3018	18.0	12.0-14.5						
	SS3020	20.0	13.0-16.5						
	SS3206	6.0	1.0-3.5						
	SS3208	8.0	3.5-5.0						
	SS3210	10.0	5.0-7.0						
4.0 +0.08 -0.15	SS3212	12.0	7.0-9.0	6.9-8.4	1.7	2.60	4.1-4.2	1700	2000
	SS3214	14.0	9.0-11.0						
	SS3216	16.0	9.0-12.5						
	SS4006	6.0	1.0-3.0						
	SS4008	8.0	3.0-5.0						
	SS4010	10.0	4.0-6.5						
	SS4012	12.0	6.0-8.5						
	SS4014	14.0	7.0-10.5						
	SS4016	16.0	8.0-12.5						
	SS4018	18.0	10.0-14.5						
4.8 +0.08 -0.15	SS4020	20.0	12.0-16.0	8.3-10.1	2.0	3.1	4.9-5.0	2900	3100
	SS4025	25.0	16.0-21.0						
	SS4030	30.0	21.0-26.0						
	SS4035	35.0	26.0-30.5						
	SS4040	40.0	30.5-35.0						
	SS4806	6.0	1.0-2.5						
	SS4808	8.0	2.5-4.0						
	SS4810	10.0	4.0-6.0						
	SS4812	12.0	6.0-8.0						
	SS4814	14.0	8.0-10.0						
	SS4816	16.0	9.0-12.0						
	SS4818	18.0	10.0-14.0						
	SS4820	20.0	12.0-16.0						
	SS4825	25.0	16.0-21.0						
SS4830	30.0	21.0-25.0							
6.4 +0.08 -0.15	SS4835	35.0	25.0-30.0	11.6-13.4	2.7	4.20	6.5-6.6	4900	5700
	SS4840	40.0	30.0-35.0						
	SS4845	45.0	35.0-40.0						
	SS4850	50.0	40.0-45.0						
	SS6408	8.0	1.5-3.0						
	SS6410	10.0	2.0-4.0						
	SS6412	12.0	3.0-6.0						
	SS6414	14.0	6.0-8.0						
	SS6416	16.0	6.0-10.0						
	SS6418	18.0	8.0-12.0						
SS6420	20.0	10.0-14.0							
SS6425	25.0	14.0-18.0							
SS6430	30.0	18.0-23.0							
SS6435	35.0	23.0-28.0							
SS6440	40.0	28.0-33.0							