



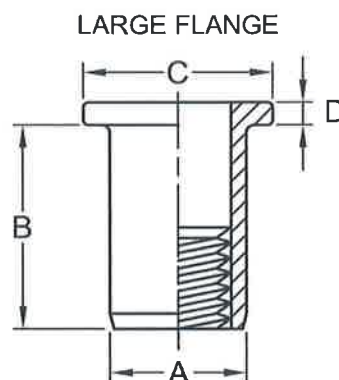

THIN SHEET NUT-INSERT

SPECIFICATIONS

MATERIAL : ALUMINUM ALLOY

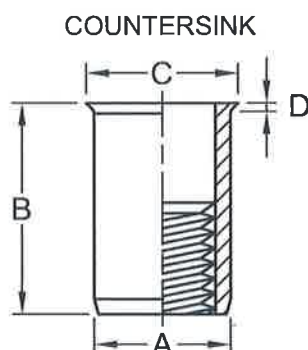

COUNTERSINK

METRIC DIMENSIONS(mm)

THREAD SIZE	ITEM NO.	A +0 / -0.15	B ±0.3	C ±0.3	D ±0.1	GRIP RANGE	HOLE
M3 x 0.5	AA SM315	5.00	9.00	6.00	0.50	0.5 ~ 1.5	5.10
M4 x 0.7	AA SM425	6.00	11.00	7.00	0.50	0.8 ~ 2.5	6.10
	AA SM435		12.00			2.5 ~ 3.5	
M5 x 0.8	AA SM525	7.00	12.00	8.00	0.50	0.8 ~ 2.5	7.10
	AA SM535		13.00			2.5 ~ 3.5	
M6 x 1.0	AA SM625	9.00	14.00	10.00	0.50	1.0 ~ 2.5	9.10
	AA SM640		15.50			2.5 ~ 4.0	
M8 x 1.25	AA SM825	11.00	15.50	12.00	0.70	1.0 ~ 2.5	11.10
	AA SM840		17.00			2.5 ~ 4.0	
M10 x 1.50	AA SM1025	13.00	16.00	14.00	0.70	1.0 ~ 2.5	13.10
	AA SM1040		17.50			2.5 ~ 4.0	

LARGE FLANGE

METRIC DIMENSIONS(mm)

THREAD SIZE	ITEM NO.	A +0 / -0.15	B ±0.3	C ±0.3	D ±0.1	GRIP RANGE	HOLE
M3 x 0.5	AA LM315	5.00	9.00	8.00	0.80	0.5 ~ 1.5	5.10
M4 x 0.7	AA LM425	6.00	10.50	9.00	0.80	0.8 ~ 2.5	6.10
	AA LM435		11.50			2.5 ~ 3.5	
M5 x 0.8	AA LM525	7.00	11.50	10.00	1.00	0.8 ~ 2.5	7.10
	AA LM535		12.50			2.5 ~ 3.5	
M6 x 1.0	AA LM625	9.00	13.50	12.50	1.50	1.0 ~ 2.5	9.10
	AA LM640		15.00			2.5 ~ 4.0	
M8 x 1.25	AA LM825	11.00	15.00	14.50	1.50	1.0 ~ 2.5	11.10
	AA LM840		16.50			2.5 ~ 4.0	
M10 x 1.50	AA LM1025	13.00	15.50	16.50	1.50	1.0 ~ 2.5	13.10
	AA LM1040		17.00			2.5 ~ 4.0	