


ASC

铝铁开口型沉头抽芯铆钉 Aluminum/Steel CSK Head

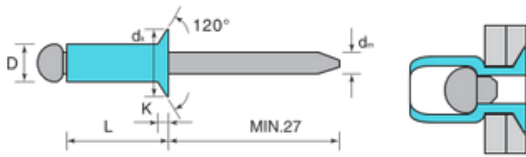

MATERIAL 材质

Body:5050Alu.5052Alu.5154Alu.5056Alu

铆体:5050铝.5052铝.5154铝.5056铝

Mandrel:Steel 钉芯:铁

FINISH 表面颜色

Body:Polished 铆体:抛光

Mandrel:Zinc Plated 钉芯:镀锌



D	L	dk	k	dm	HOLE SIZE(DRILL)	Shear (N)	Tensile (N)		
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE(DRILL)	MIN.	MIN.
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ		
2.4 +0.08 -0.15	ASC2404	4.0	0.5-2.0	4.2-4.8	1.0	1.6	2.5-2.6	5050Alu. 180N	5050Alu. 280N
	ASC2406	6.0	2.0-4.0						
	ASC2408	8.0	4.0-6.0						
	ASC2410	10.0	6.0-8.0						
	ASC2412	12.0	7.0-9.5						
	ASC2414	14.0	8.0-11.5						
3.0 +0.08 -0.15	ASC2416	16.0	10.0-13.0	5.2-6.3	1.3	2.00	3.1-3.2	5050Alu. 300N	5050Alu. 400N
	ASC3006	6.0	1.0-3.5						
	ASC3008	8.0	3.5-5.0						
	ASC3010	10.0	5.0-7.0						
	ASC3012	12.0	7.0-9.0						
	ASC3014	14.0	9.0-11.0						
3.2 +0.08 -0.15	ASC3016	16.0	9.0-12.5	5.4-6.3	1.3	2.00	3.3-3.4	5050Alu. 400N	5050Alu. 500N
	ASC3018	18.0	12.0-14.5						
	ASC3020	20.0	13.0-16.5						
	ASC3206	6.0	1.0-3.5						
	ASC3208	8.0	3.5-5.0						
	ASC3210	10.0	5.0-7.0						
4.0 +0.08 -0.15	ASC3212	12.0	7.0-9.0	6.9-7.5	1.7	2.50	4.1-4.2	5050Alu. 500N	5050Alu. 700N
	ASC3214	14.0	9.0-11.0						
	ASC3216	16.0	9.0-12.5						
	ASC3218	18.0	12.0-14.5						
	ASC3220	20.0	13.0-16.5						
	ASC3225	25.0	15.0-21.0						
	ASC4006	6.0	1.0-3.0						
	ASC4008	8.0	3.0-5.0						
	ASC4010	10.0	4.0-6.5						
	ASC4012	12.0	6.0-8.5						
4.8 +0.08 -0.15	ASC4014	14.0	7.0-10.5	8.3-9.5	2.0	3	4.9-5.0	5050Alu. 800N	5050Alu. 1000N
	ASC4016	16.0	8.0-12.5						
	ASC4018	18.0	10.0-14.5						
	ASC4020	20.0	12.0-16.0						
	ASC4025	25.0	16.0-21.0						
	ASC4030	30.0	21.0-26.0						
	ASC4035	35.0	26.0-30.5						
	ASC4040	40.0	30.5-35.0						
	ASC4806	6.0	1.0-2.5						
	ASC4808	8.0	2.5-4.0						
ASC4810	10.0	4.0-6.0							
ASC4812	12.0	6.0-8.0							
ASC4814	14.0	8.0-10.0							
ASC4816	16.0	8.0-12.0							
ASC4818	18.0	10.0-14.0							
ASC4820	20.0	12.0-16.0							
ASC4825	25.0	16.0-21.0							
ASC4830	30.0	21.0-25.0							
ASC4835	35.0	25.0-30.0							
ASC4840	40.0	30.0-35.0							
ASC4845	45.0	35-40.0							
ASC4850	50.0	40.0-45.0							